


Hybrid Inverter

SUN-3.6/5/6K-SG03LP1-EU



Colorful touch LCD, IP65 protection degree

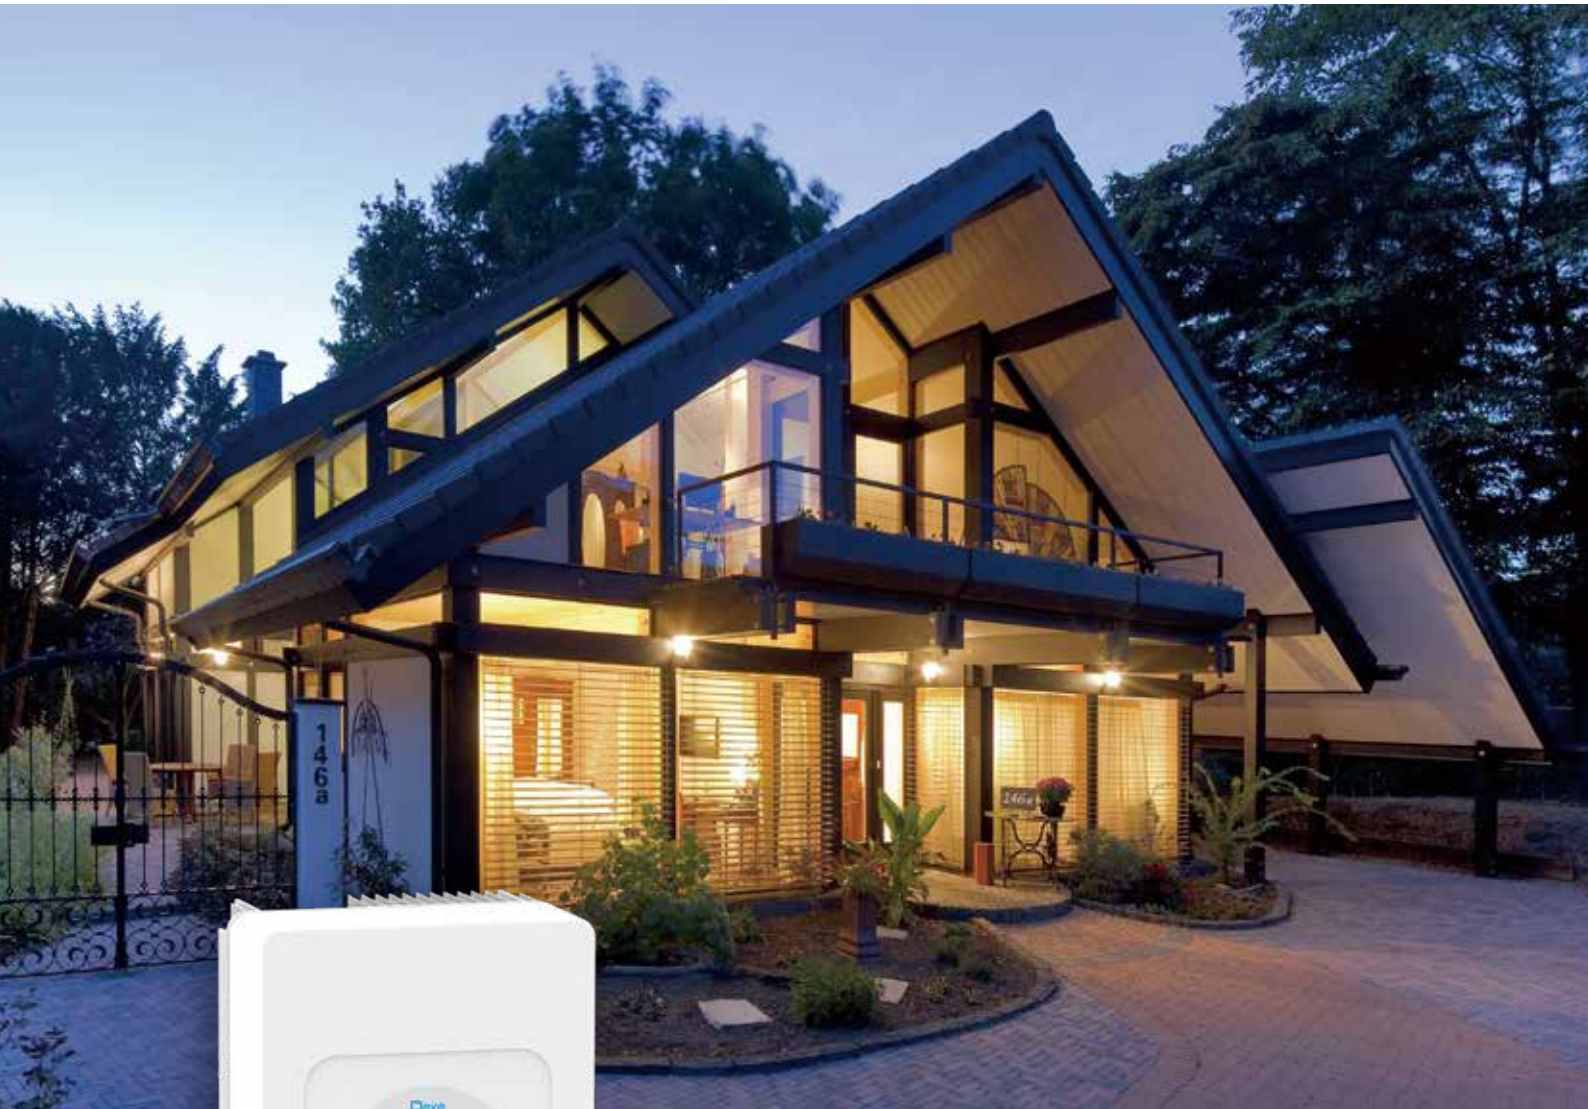

AC couple to retrofit existing solar system



Max. 16 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel



Max. charging/discharging current of 135A



6 time periods for battery charging/discharging



Support storing energy from diesel generator

Deye

Stock Code: 605117.SH

| Model | SUN-3.6K -SG03LP1-EU | SUN-5K -SG03LP1-EU | SUN-6K -SG03LP1-EU |
|--|--|-----------------------|-----------------------|
| Battery Input Data | | | |
| Battery Type | Lead-acid or Lithium-ion | | |
| Battery Voltage Range (V) | 40-60 | | |
| Max. Charging Current (A) | 90 | 120 | 135 |
| Max. Discharging Current (A) | 90 | 120 | 135 |
| Charging Strategy for Li-ion Battery | Self-adaption to BMS | | |
| Number of Battery Input | 1 | | |
| PV String Input Data | | | |
| Max. DC Input Power (W) | 4680 | 6500 | 7800 |
| Max. DC Input Voltage (V) | 500 | | |
| Start-up Voltage (V) | 125 | | |
| MPPT Voltage Range (V) | 150-425 | | |
| Rated DC Input Voltage (V) | 370 | | |
| Max. Operating PV Input Current (A) | 13+13 | | |
| Max. Input Short-Circuit Current (A) | 17+17 | | |
| No. of MPP Trackers/ No. of Strings per MPP Tracker | 2/1+1 | | |
| AC Input/Output Data | | | |
| Rated AC Input/Output Active Power (W) | 3600 | 5000 | 6000 |
| Max. AC Input/Output Apparent Power (VA) | 3960 | 5500 | 6600 |
| Rated AC Input/Output Current (A) | 16.4/15.7 | 22.7/21.7 | 27.3/26.1 |
| Max. AC Input/Output Current (A) | 18/17.2 | 25/23.9 | 30/28.7 |
| Max. Continuous AC Passthrough (grid to load) (A) | 35 | | 40 |
| Peak Power (off-grid) (W) | 2 times of rated power, 10s | | |
| Power Factor Adjustment Range | 0.8 leading to 0.8 lagging | | |
| Rated Input/Output Voltage/Range (V) | 220/230 0.85Un-1.1Un | | |
| Rated Input/Output Grid Frequency/Range(Hz) | 50/45-55, 60/55-65 | | |
| Grid Connection Form | L+N+PE | | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | | |
| DC Injection Current | <0.5% In | | |
| Efficiency | | | |
| Max. Efficiency | 97.6% | | |
| Euro Efficiency | 96.5% | | |
| MPPT Efficiency | >99% | | |
| Equipment Protection | | | |
| Integrated | DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level | | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | | |
| Interface | | | |
| Communication Interface | WIFI, RS485, CAN | | |
| General Data | | | |
| Operating Temperature Range () | -40 to +60°C, >45°C Derating | | |
| Permissible Ambient Humidity | 0-100% | | |
| Permissible Altitude | 2000m | | |
| Noise (dB) | <30 | | |
| Ingress Protection(IP) Rating | IP 65 | | |
| Inverter Topology | Non-Isolated | | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | | |
| Cabinet Size (WxHxD mm) | 330x580x232 (Excluding Connectors and Brackets) | | |
| Weight (kg) | 25 | | |
| Type of Cooling | Intelligent Air Cooling | | |
| Warranty | 5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | | |
| Grid Regulation | IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105 | | |
| Safety / EMC Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | |

Hybrid Inverter

SUN-7.6/8K-SG01LP1-EU



Colorful touch LCD, IP65 protection degree



AC couple to retrofit existing solar system



Max. 16 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel



Max. charging/discharging current of 190A



6 time periods for battery charging/discharging



Support storing energy from diesel generator

Deye

Stock Code: 605117.SH

| Model | SUN-7.6K-SG01LP1-EU | SUN-8K-SG01LP1-EU |
|--|--|-------------------|
| Battery Input Data | | |
| Battery Type | Lead-acid or Lithium-ion | |
| Battery Voltage Range (V) | 40-60 | |
| Max. Charging Current (A) | 190 | 190 |
| Max. Discharging Current (A) | 190 | 190 |
| Charging Strategy for Li-ion Battery | Self-adaption to BMS | |
| Number of Battery Input | 1 | |
| PV String Input Data | | |
| Max. DC Input Power (W) | 9880 | 10400 |
| Max. DC Input Voltage (V) | 500 | |
| Start-up Voltage (V) | 125 | |
| MPPT Voltage Range (V) | 150-425 | |
| Rated DC Input Voltage (V) | 370 | |
| Max. Operating PV Input Current (A) | 26+26 | |
| Max. Input Short-Circuit Current (A) | 34+34 | |
| No. of MPP Trackers/ No. of Strings per MPP Tracker | 2/2+2 | |
| AC Input/Output Data | | |
| Rated AC Input/Output Active Power (W) | 7600 | 8000 |
| Max. AC Input/Output Apparent Power (VA) | 8360 | 8800 |
| Rated AC Input/Output Current (A) | 34.5/33 | 36.4/34.8 |
| Max. AC Input/Output Current (A) | 38/36.3 | 40/38.3 |
| Max. Continuous AC Passthrough (grid to load) (A) | 50 | |
| Peak Power (off-grid) (W) | 2 times of rated power, 10s | |
| Power Factor Adjustment Range | 0.8 leading to 0.8 lagging | |
| Rated Input/Output Voltage/Range (V) | 220/230 0.85Un-1.1Un | |
| Rated Input/Output Grid Frequency/Range(Hz) | 50/45-55, 60/55-65 | |
| Grid Connection Form | L+N+PE | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | |
| DC Injection Current | <0.5% In | |
| Efficiency | | |
| Max. Efficiency | 97.6% | |
| Euro Efficiency | 96.5% | |
| MPPT Efficiency | >99% | |
| Equipment Protection | | |
| Integrated | DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | |
| Interface | | |
| Communication Interface | WIFI, RS485, CAN | |
| General Data | | |
| Operating Temperature Range () | -40 to +60°C, >45°C Derating | |
| Permissible Ambient Humidity | 0-100% | |
| Permissible Altitude | 2000m | |
| Noise (dB) | <30 | |
| Ingress Protection(IP) Rating | IP 65 | |
| Inverter Topology | Non-Isolated | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | |
| Cabinet Size (WxHxD mm) | 420×670×233 (Excluding Connectors and Brackets) | |
| Weight (kg) | 32 | |
| Type of Cooling | Intelligent Air Cooling | |
| Warranty | 5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | |
| Grid Regulation | IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105 | |
| Safety / EMC Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | |

Hybrid Inverter

SUN-7.6/8K-SG02LP1-EU-AM2

SUN-10/12K-SG02LP1-EU-AM3



Colorful touch LCD, IP65 protection degree



AC couple to retrofit existing solar system



Max. 16 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel



Max. charging/discharging current of 250A



6 time periods for battery charging/discharging



Support storing energy from diesel generator


Deye

Stock Code: 605117.SH

| Model | UN-7.6K-SG02 LP1-EU-AM2 | SUN-8K-SG02 LP1-EU-AM2 | SUN-10K-SG02 LP1-EU-AM3 | SUN-12K-SG02 LP1-EU-AM3 |
|--|--|---------------------------|----------------------------|----------------------------|
| Battery Input Data | | | | |
| Battery Type | Lead-acid or Lithium-ion | | | |
| Battery Voltage Range (V) | 40-60 | | | |
| Max. Charging Current (A) | 190 | 190 | 220 | 250 |
| Max. Discharging Current (A) | 190 | 190 | 220 | 250 |
| Charging Strategy for Li-ion Battery | Self-adaption to BMS | | | |
| Number of Battery Input | 1 | | | |
| PV String Input Data | | | | |
| Max. DC Input Power (W) | 9880 | 10400 | 13000 | 15600 |
| Max. DC Input Voltage (V) | 500 | | | |
| Start-up Voltage (V) | 125 | | | |
| MPPT Voltage Range (V) | 150-425 | | | |
| Rated DC Input Voltage (V) | 370 | | | |
| Max. Operating PV Input Current (A) | 26+26 | | 26+26+26 | |
| Max. Input Short-Circuit Current (A) | 44+44 | | 44+44+44 | |
| No. of MPP Trackers/ No. of Strings per MPP Tracker | 2/2+2 | | 3/2+2+2 | |
| AC Input/Output Data | | | | |
| Rated AC Input/Output Active Power (W) | 76000 | 8000 | 10000 | 12000 |
| Max. AC Input/Output Apparent Power (VA) | 8360 | 8800 | 11000 | 13200 |
| Rated AC Input/Output Current (A) | 34.6/33.1 | 36.4/34.8 | 45.5/43.5 | 54.6/52.2 |
| Max. AC Input/Output Current (A) | 38/36.4 | 40/38.3 | 50/47.9 | 60/57.4 |
| Max. Continuous AC Passthrough (grid to load) (A) | 50 | | 60 | |
| Peak Power (off-grid) (W) | 2 times of rated power, 10s | | | |
| Power Factor Adjustment Range | 0.8 leading to 0.8 lagging | | | |
| Rated Input/Output Voltage/Range (V) | 220/230 0.85Un-1.1Un | | | |
| Rated Input/Output Grid Frequency/Range(Hz) | 50/45-55, 60/55-65 | | | |
| Grid Connection Form | L+N+PE | | | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | | | |
| DC Injection Current | <0.5% In | | | |
| Efficiency | | | | |
| Max. Efficiency | 97.6% | | | |
| Euro Efficiency | 96.5% | | | |
| MPPT Efficiency | >99% | | | |
| Equipment Protection | | | | |
| Integrated | DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level | | | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | | | |
| Interface | | | | |
| Communication Interface | WIFI, RS485, CAN | | | |
| General Data | | | | |
| Operating Temperature Range () | -40 to +60°C, >45°C Derating | | | |
| Permissible Ambient Humidity | 0-100% | | | |
| Permissible Altitude | 2000m | | | |
| Noise (dB) | <45 | | | |
| Ingress Protection(IP) Rating | IP 65 | | | |
| Inverter Topology | Non-Isolated | | | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | | | |
| Cabinet Size (WxHxD mm) | 420×670×233 (Excluding Connectors and Brackets) | | | |
| Weight (kg) | 35.6 | | | |
| Type of Cooling | Intelligent Air Cooling | | | |
| Warranty | 5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | | | |
| Grid Regulation | VDE4105, IEC61727/62116, VDE0126, AS4777.2, CEI 0 21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149/NBR16150 | | | |
| Safety / EMC Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | |

Hybrid Inverter

SUN-12/14/16K-SG01LP1-EU

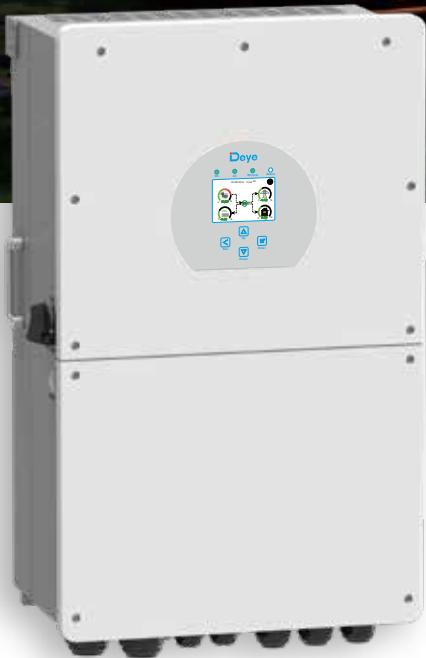

Colorful touch LCD, IP65 protection degree



AC couple to retrofit existing solar system



Max. 16 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel



Max. charging/discharging current of 290A



6 time periods for battery charging/discharging



Support storing energy from diesel generator


Deye



Stock Code: 605117.SH

| Model | SUN-12K-SG01LP1-EU | SUN-14K-SG01LP1-EU | SUN-16K-SG01LP1-EU |
|--|--|--------------------|--------------------|
| Battery Input Data | | | |
| Battery Type | Lead-acid or Lithium-ion | | |
| Battery Voltage Range (V) | 40-60 | | |
| Max. Charging Current (A) | 220 | 250 | 290 |
| Max. Discharging Current (A) | 220 | 250 | 290 |
| Charging Strategy for Li-ion Battery | Self-adaption to BMS | | |
| Number of Battery Input | 2 | | |
| PV String Input Data | | | |
| Max. DC Input Power (W) | 15600 | 18200 | 20800 |
| Max. DC Input Voltage (V) | 500 | | |
| Start-up Voltage (V) | 125 | | |
| MPPT Voltage Range (V) | 150-425 | | |
| Rated DC Input Voltage (V) | 370 | | |
| Max. Operating PV Input Current (A) | 26+26+26 | | |
| Max. Input Short-Circuit Current (A) | 44+44+44 | | |
| No. of MPP Trackers/ No. of Strings per MPP Tracker | 3/2+2+2 | | |
| AC Input/Output Data | | | |
| Rated AC Input/Output Active Power (W) | 12000 | 14000 | 16000 |
| Max. AC Input/Output Apparent Power (VA) | 13200 | 15400 | 17600 |
| Rated AC Input/Output Current (A) | 54.5/52.2 | 63.6/60.9 | 72.7/69.6 |
| Max. AC Input/Output Current (A) | 60/57.4 | 70/67 | 80/76.5 |
| Max. Continuous AC Passthrough (grid to load) (A) | 100 | | |
| Peak Power (off-grid) (W) | 2 times of rated power, 10s | | |
| Power Factor Adjustment Range | 0.8 leading to 0.8 lagging | | |
| Rated Input/Output Voltage/Range (V) | 220/230 0.85Un-1.1Un | | |
| Rated Input/Output Grid Frequency/Range(Hz) | 50/45-55, 60/55-65 | | |
| Grid Connection Form | L+N+PE | | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | | |
| DC Injection Current | <0.5% In | | |
| Efficiency | | | |
| Max. Efficiency | 97.6% | | |
| Euro Efficiency | 96.5% | | |
| MPPT Efficiency | >99% | | |
| Equipment Protection | | | |
| Integrated | DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level | | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | | |
| Interface | | | |
| Communication Interface | WIFI, RS485, CAN | | |
| General Data | | | |
| Operating Temperature Range () | -40 to +60°C, >45°C Derating | | |
| Permissible Ambient Humidity | 0-100% | | |
| Permissible Altitude | 2000m | | |
| Noise (dB) | <50 | | |
| Ingress Protection(IP) Rating | IP 65 | | |
| Inverter Topology | Non-Isolated | | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | | |
| Cabinet Size (WxHxD mm) | 464×763×282 (Excluding Connectors and Brackets) | | |
| Weight (kg) | 52 | | |
| Type of Cooling | Intelligent Air Cooling | | |
| Warranty | 5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | | |
| Grid Regulation | IEC 61727, IEC 62116, AS 4777.2, NRS 097 | | |
| Safety / EMC Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | |

Three Phase Hybrid Inverter

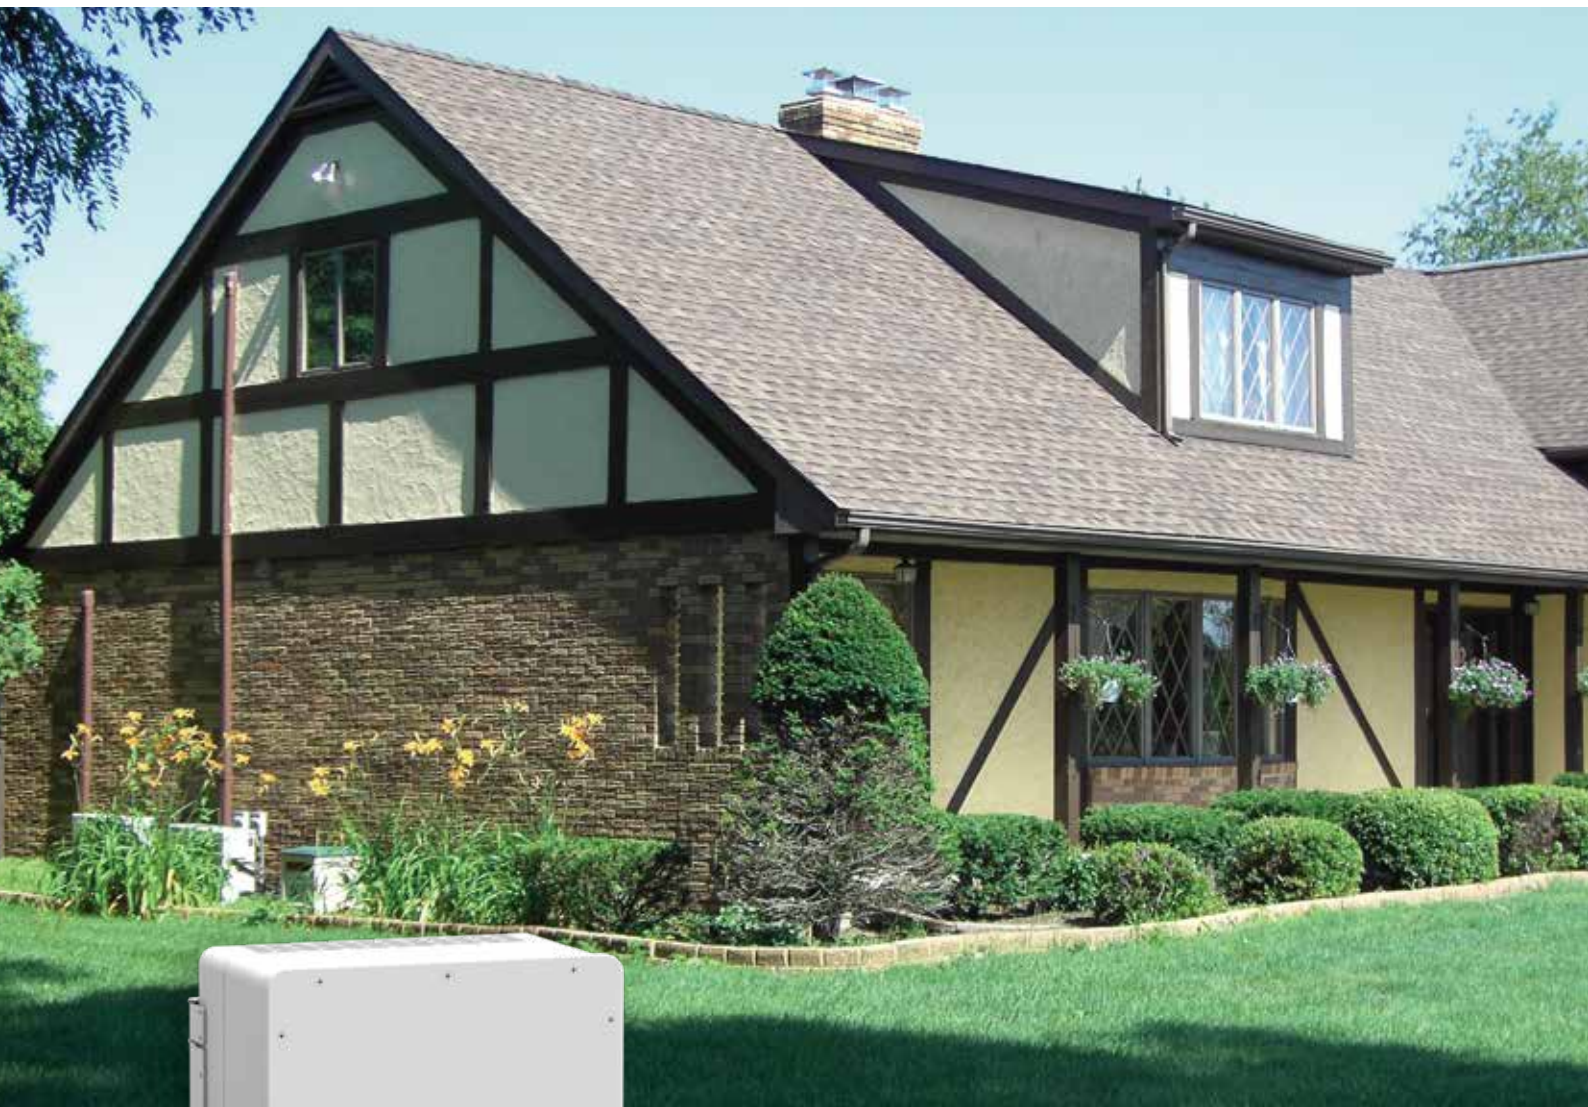SUN-5/6/8/10/12K-SG04LP3-EU



- 100** 100% unbalanced output, each phase; Max. output up to 50% rated power
-  AC couple to retrofit existing solar system
- 10** Max. 10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- 240** Max. charging/discharging current of 240A
- 48** 48V low voltage battery, transformer isolation design
- 6** 6 time periods for battery charging/discharging
-  Support storing energy from diesel generator


Deye



Stock Code: 605117.SH

| Model | SUN-5K -SG04LP3-EU | SUN-6K -SG04LP3-EU | SUN-8K -SG04LP3-EU | SUN-10K -SG04LP3-EU | SUN-12K -SG04LP3-EU |
|--|--|-----------------------|-----------------------|------------------------|------------------------|
| Battery Input Data | | | | | |
| Battery Type | Lead-acid or Lithium-ion | | | | |
| Battery Voltage Range (V) | 40-60 | | | | |
| Max. Charging Current (A) | 120 | 150 | 190 | 210 | 240 |
| Max. Discharging Current (A) | 120 | 150 | 190 | 210 | 240 |
| Charging Strategy for Li-ion Battery | Self-adaption to BMS | | | | |
| Number of Battery Input | 1 | | | | |
| PV String Input Data | | | | | |
| Max. DC Input Power (W) | 6500 | 7800 | 10400 | 13000 | 15600 |
| Max. DC Input Voltage (V) | 800 | | | | |
| Start-up Voltage (V) | 160 | | | | |
| MPPT Voltage Range (V) | 200-650 | | | | |
| Rated DC Input Voltage (V) | 550 | | | | |
| Max. Operating PV Input Current (A) | 13+13 | | | 26+13 | |
| Max. Input Short-Circuit Current (A) | 17+17 | | | 34+17 | |
| No. of MPP Trackers/ No. of Strings per MPP Tracker | 2/1+1 | | | 2/2+1 | |
| AC Input/Output Data | | | | | |
| Rated AC Input/Output Active Power (W) | 5000 | 6000 | 8000 | 10000 | 12000 |
| Max. AC Input/Output Apparent Power (VA) | 5500 | 6600 | 8800 | 11000 | 13200 |
| Rated AC Input/Output Current (A) | 7.6/7.2 | 9.1/8.7 | 12.1/11.6 | 15.2/14.5 | 18.2/17.4 |
| Max. AC Input/Output Current (A) | 8.4/8 | 10/9.6 | 13.4/12.8 | 16.7/15.9 | 20/19.1 |
| Max. Three-phase Unbalanced Output Current (A) | 11.4/10.9 | 13.6/13 | 18.2/17.4 | 22.7/21.7 | 27.3/26.1 |
| Max. Continuous AC Passthrough (grid to load) (A) | 45 | | | | |
| Peak Power (off-grid) (W) | 2 times of rated power, 10s | | | | |
| Power Factor Adjustment Range | 0.8 leading to 0.8 lagging | | | | |
| Rated Input/Output Voltage/Range (V) | 220/380V, 230/400V 0.85Un-1.1Un | | | | |
| Rated Input/Output Grid Frequency/Range(Hz) | 50/45-55, 60/55-65 | | | | |
| Grid Connection Form | 3L+N+PE | | | | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | | | | |
| DC Injection Current | <0.5% In | | | | |
| Efficiency | | | | | |
| Max. Efficiency | 97.6% | | | | |
| Euro Efficiency | 97.0% | | | | |
| MPPT Efficiency | >99% | | | | |
| Equipment Protection | | | | | |
| Integrated | DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level | | | | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | | | | |
| Interface | | | | | |
| Communication Interface | WIFI, RS485, CAN | | | | |
| General Data | | | | | |
| Operating Temperature Range () | -40 to +60°C, >45°C Derating | | | | |
| Permissible Ambient Humidity | 0-100% | | | | |
| Permissible Altitude | 2000m | | | | |
| Noise (dB) | ≤55 | | | | |
| Ingress Protection(IP) Rating | IP 65 | | | | |
| Inverter Topology | Non-Isolated | | | | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | | | | |
| Cabinet Size (WxHxD mm) | 422×658×254 (Excluding Connectors and Brackets) | | | | |
| Weight (kg) | 38 | | | | |
| Type of Cooling | Intelligent Air Cooling | | | | |
| Warranty | 5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | | | | |
| Grid Regulation | IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105 | | | | |
| Safety / EMC Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | |

Three Phase Hybrid Inverter

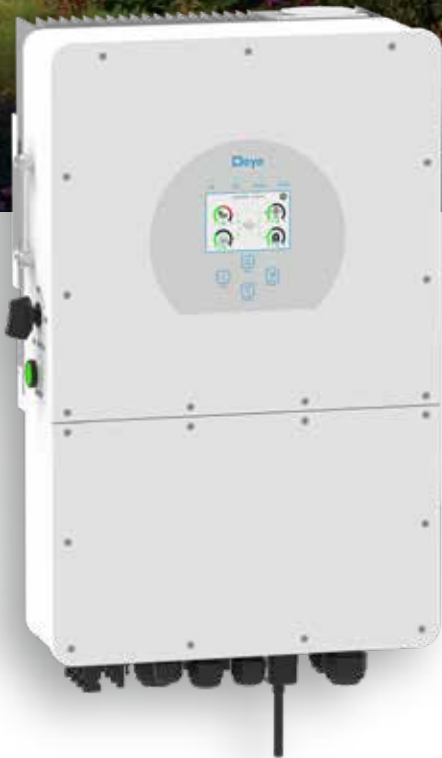SUN-5/6/8/10/12/15/20/25K-SG01HP3-EU-AM2



- 100** 100% unbalanced output, each phase
-  AC couple to retrofit existing solar system
- 10** Max. 10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- 50** Max. charging/discharging current of 50A
- H** High voltage battery, higher efficiency
- 6** 6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Deye

Stock Code: 605117.SH



| Model | SUN-5K-SG01 HP3-EU-AM2 | SUN-6K-SG01 HP3-EU-AM2 | SUN-8K-SG01 HP3-EU-AM2 | SUN-10K-SG01 HP3-EU-AM2 | SUN-12K-SG01 HP3-EU-AM2 | SUN-15K-SG01 HP3-EU-AM2 | SUN-20K-SG01 HP3-EU-AM2 | SUN-25K-SG01 HP3-EU-AM2 |
|--|--|---------------------------|---------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Battery Input Data | | | | | | | | |
| Battery Type | Lithium-ion | | | | | | | |
| Battery Voltage Range (V) | 160-700 | | | | | | | |
| Max. Charging Current (A) | 30 | 30 | 37 | | | 50 | | |
| Max. Discharging Current (A) | 30 | 30 | 37 | | | 50 | | |
| Charging Strategy for Li-ion Battery | Self-adaption to BMS | | | | | | | |
| Number of Battery Input | 1 | | | | | | | |
| PV String Input Data | | | | | | | | |
| Max. DC Input Power (W) | 6500 | 7800 | 10400 | 13000 | 15600 | 19500 | 26000 | 32500 |
| Max. DC Input Voltage (V) | 1000 | | | | | | | |
| Start-up Voltage (V) | 180 | | | | | | | |
| MPPT Voltage Range (V) | 150-850 | | | | | | | |
| Rated DC Input Voltage (V) | 600 | | | | | | | 700 |
| Max. Operating PV Input Current (A) | 20+20 | | | | 26+20 | | 26+26 | |
| Max. Input Short-Circuit Current (A) | 30+30 | | | | 39+30 | | 39+39 | |
| No. of MPP Trackers/ No. of Strings per MPP Tracker | 2/1+1 | | | | 2/2+1 | | 2/2+2 | |
| AC Input/Output Data | | | | | | | | |
| Rated AC Input/Output Active Power (W) | 5000 | 6000 | 8000 | 10000 | 12000 | 15000 | 20000 | 25000 |
| Max. AC Input/Output Apparent Power (VA) | 5500 | 6600 | 8800 | 11000 | 13200 | 16500 | 22000 | 27500 |
| Rated AC Input/Output Current (A) | 7.6/7.3 | 9.1/8.7 | 12.2/11.6 | 15.2/14.5 | 18.2/17.4 | 22.8/21.8 | 30.4/29 | 37.9/36.3 |
| Max. AC Input/Output Current (A) | 8.4/8 | 10/9.6 | 13.4/12.8 | 16.7/16 | 20/19.2 | 25/24 | 33.4/31.9 | 41.7/39.9 |
| Max. Three-phase Unbalanced Output Current (A) | 13 | 13 | 18 | 22 | 25 | 30 | 35 | 41.7 |
| Max. Continuous AC Passthrough (grid to load) (A) | 40 | | | | 80 | | | |
| Peak Power (off-grid) (W) | 1.5 times of rated power, 10s | | | | | | | |
| Power Factor Adjustment Range | 0.8 leading to 0.8 lagging | | | | | | | |
| Rated Input/Output Voltage/Range (V) | 220/380V, 230/400V 0.85Un-1.1Un | | | | | | | |
| Rated Input/Output Grid Frequency/Range(Hz) | 50/45-55, 60/55-65 | | | | | | | |
| Grid Connection Form | 3L+N+PE | | | | | | | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | | | | | | | |
| DC Injection Current | <0.5% In | | | | | | | |
| Efficiency | | | | | | | | |
| Max. Efficiency | 97.6% | | | | | | | |
| Euro Efficiency | 97.0% | | | | | | | |
| MPPT Efficiency | >99% | | | | | | | |
| Equipment Protection | | | | | | | | |
| Integrated | DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level | | | | | | | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | | | | | | | |
| Interface | | | | | | | | |
| Communication Interface | WIFI, RS485, CAN | | | | | | | |
| General Data | | | | | | | | |
| Operating Temperature Range () | -40 to +60°C, >45°C Derating | | | | | | | |
| Permissible Ambient Humidity | 0-100% | | | | | | | |
| Permissible Altitude | 2000m | | | | | | | |
| Noise (dB) | ≤55 | | | | | | | |
| Ingress Protection(IP) Rating | IP 65 | | | | | | | |
| Inverter Topology | Non-Isolated | | | | | | | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | | | | | | | |
| Cabinet Size (WxHxD mm) | 408×638×237 (Excluding Connectors and Brackets) | | | | | | | |
| Weight (kg) | 30.5 | | | | | | | |
| Type of Cooling | Natural Cooling | | | | Intelligent Air Cooling | | | |
| Warranty | 5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | | | | | | | |
| Grid Regulation | IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105 | | | | | | | |
| Safety / EMC Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | | | | |

Three Phase Hybrid Inverter

SUN-29.9/30/35K-SG01HP3-EU-BM3

SUN-40/50K-SG01HP3-EU-BM4



- 100** 100% unbalanced output, each phase
-  AC couple to retrofit existing solar system
- 10** Max. 10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- 100** Max. charging/discharging current of 100A
- H** High voltage battery, higher efficiency
- 6** 6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Deye

Stock Code: 605117.SH

| Model | SUN-29.9K-SG01HP3 -EU-BM3 | SUN-30K-SG01HP3 -EU-BM3 | SUN-35K-SG01HP3 -EU-BM3 | SUN-40K-SG01HP3 -EU-BM4 | SUN-50K-SG01HP3 -EU-BM4 |
|--|--|----------------------------|----------------------------|----------------------------|----------------------------|
| Battery Input Data | | | | | |
| Battery Type | Lithium-ion | | | | |
| Battery Voltage Range (V) | 160-800 | | | | |
| Max. Charging Current (A) | 50+50 | | | | |
| Max. Discharging Current (A) | 50+50 | | | | |
| Charging Strategy for Li-ion Battery | Self-adaption to BMS | | | | |
| Number of Battery Input | 2 | | | | |
| PV String Input Data | | | | | |
| Max. DC Input Power (W) | 38870 | 39000 | 45500 | 52000 | 65000 |
| Max. DC Input Voltage (V) | 1000 | | | | |
| Start-up Voltage (V) | 180 | | | | |
| MPPT Voltage Range (V) | 150-850 | | | | |
| Rated DC Input Voltage (V) | 600 | | | | |
| Max. Operating PV Input Current (A) | 36+36+36 | | | 36+36+36+36 | |
| Max. Input Short-Circuit Current (A) | 55+55+55 | | | 55+55+55+55 | |
| No. of MPP Trackers/ No. of Strings per MPP Tracker | 3/2+2+2 | | | 4/2+2+2+2 | |
| AC Input/Output Data | | | | | |
| Rated AC Input/Output Active Power (W) | 29900 | 30000 | 35000 | 40000 | 50000 |
| Max. AC Input/Output Apparent Power (VA) | 29900 | 33000 | 38500 | 44000 | 55000 |
| Rated AC Input/Output Current (A) | 45.4/43.4 | 45.5/43.5 | 53.1/50.8 | 60.7/58 | 75.8/72.5 |
| Max. AC Input/Output Current (A) | 45.4/43.4 | 50/47.9 | 58.4/55.8 | 66.7/63.8 | 83.4/79.8 |
| Max. Three-phase Unbalanced Output Current (A) | 60 | 60 | 60 | 70 | 83.3 |
| Max. Continuous AC Passthrough (grid to load) (A) | 200 | | | | |
| Peak Power (off-grid) (W) | 1.5 times of rated power, 10s | | | | |
| Power Factor Adjustment Range | 0.8 leading to 0.8 lagging | | | | |
| Rated Input/Output Voltage/Range (V) | 220/380V, 230/400V 0.85Un-1.1Un | | | | |
| Rated Input/Output Grid Frequency/Range(Hz) | 50/45-55, 60/55-65 | | | | |
| Grid Connection Form | 3L+N+PE | | | | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | | | | |
| DC Injection Current | <0.5% In | | | | |
| Efficiency | | | | | |
| Max. Efficiency | 97.60% | | | | |
| Euro Efficiency | 97.0% | | | | |
| MPPT Efficiency | >99% | | | | |
| Equipment Protection | | | | | |
| Integrated | DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level | | | | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | | | | |
| Interface | | | | | |
| Communication Interface | WIFI, RS485, CAN | | | | |
| General Data | | | | | |
| Operating Temperature Range () | -40 to +60°C, >45°C Derating | | | | |
| Permissible Ambient Humidity | 0-100% | | | | |
| Permissible Altitude | 2000m | | | | |
| Noise (dB) | ≤65 | | | | |
| Ingress Protection(IP) Rating | IP 65 | | | | |
| Inverter Topology | Non-Isolated | | | | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | | | | |
| Cabinet Size (WxHxD mm) | 527×894×294 (Excluding Connectors and Brackets) | | | | |
| Weight (kg) | 80 | | | | |
| Type of Cooling | Intelligent Air Cooling | | | | |
| Warranty | 5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | | | | |
| Grid Regulation | IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105 | | | | |
| Safety / EMC Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | |